

MOUNTEDTRANSFERCARTS



TRANSFERRING BATTERIES WITH SACKETT TRANSFER CARTS PROVIDES SAFE, EFFICIENT TRANSPORTATION OF YOUR FORK LIFT BATTERIES.

Whether you are utilizing opportunity charging, or conventional charging, these durable carts allow batteries to be removed quickly from forklifts for charging, servicing or watering. Available in several models and widths, Sackett has transfer cart solutions that save you time – and money, while keeping your business moving.

Model A-PJTC is the most economic alternative which allows manual battery extraction from fork lift and can be pushed into a fork lift manually. This model utilizes the pallet jack or fork lift to move the transfer cart. *Ideal usage: 1-5 battery changes per day*


Model B-PJTC is the safest and the best value – it has powered extraction of the battery from the forklift and uses the powered extraction arm to push the battery back into the forklift. *Ideal usage: 5-20 battery changes per day*

Model C-PJTC is the most versatile – it is powered like the B-PJTC but has a range of transfer heights from 6-1/2" to 26-1/2". *Ideal usage: 5-20 battery changes per day.*



Storage Battery Systems LLC N56 W16665 Ridgewood Drive Menomonee Falls, WI 53051

4,000 lb CAPACITY

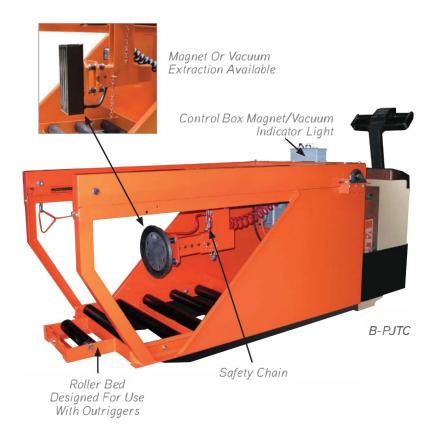



Pictured With A Drive Under Base Option



MODELS AVAILABLE

A-PJTC:

Manual Extraction

Lift: Utilize lift of Pallet Jack Roller Height: 6-1/4" to 12-1/4" Reliable standard manual extraction

B-PJTC:

Hydraulic or Electric Powered Extraction

Lift: Utilize lift of Pallet Jack Roller Height: 6-1/4" to 12-1/4" Safest, most economical, powered extraction

C-PJTC:

Hydraulic Powered Extraction

Lift: Independent Hydraulic Powered Lift Roller Height: 6-1/2" to 26-1/2" Offers maximum range for fleets with different battery transfer heights

FEATURES (all models)

- 4,000 lb. Capacity
- Magnet or Vacuum Extraction for the same price (see picture)
- Magnet/Vacuum Indicator Light
- Adjustable Telescoping Extractor Arm (4" - 8.5") (B-PJTC & C-PJTC)
- 24v Solenoid Controls (B-PJTC and C-PJTC)
- Y-Connector to Simultaneously Power Pallet Jack and Transfer Cart
- 24", 30" and 36" Wide Compartment Available
- 40" Deep Roller Bed
- 2-3/8" Dia. Non-Conductive Rollers
- 48" Fork Length Required
- · Safety Hook and Chain

OPTIONS (all models)

- 45" Deep Roller Bed (54" Forks Required)
- Drive Under Base does not require dedicated pallet truck (raises roller height 1/2")
- 90° Fork Lift Truck Pocket
- 36v Controls
- Push & Pull Plate (no magnet/vacuum)
- High "R" Spacer to Achieve Higher than 12-1/4" Roller Height (model A & B only)
- Removable insert (roller or slide strip for wider range of transfer heights)
- Clamp on kit (A-PJTC & B-PJTC)
- Welded to pallet jack
- Pallet Jack or Fork Lift not included



Storage Battery Systems LLC N56 W16665 Ridgewood Drive Menomonee Falls, WI 53051