

TOBi P.I. BLuE™

PART NUMBER: 038-541

Your Bluetooth Enabled Battery Companion

Effortless battery care, event records, now compatible with iOS & Android.

BENEFITS



Bluetooth enabled – iOS & Android compatible.



Waterproof & battery acid resistant.



TOBi report suite.



For use on 12-80V batteries.



Communicates automatically to the 305 control.

TOBi PI BLuE



WATER LEVEL


**CHARGING
TECHNOLOGIES, INC.**

St. Louis, MO U.S.A.

95FFFED493E4

Contains FCC ID: QQQMGM13P

Contains IC: 5123A-MGM13P

Input Voltage Rating: 12VDC



AS TO FIRE AND ELECTRIC,
SHOCK HAZARD ONLY
ELECTRICAL ACCESSORY FOR
USE IN INDUSTRIAL TRUCKS
AU6503

Meet TOBi P.I. BLuE™, measuring just 3"L x 1.5"W x 0.41"H. This compact device transforms battery maintenance. With Bluetooth compatibility for iOS and Android, a waterproof enclosure, and precise event records, it simplifies care. No welding or strap removal needed during its quick 15-minute installation. Experience hassle-free battery management with TOBi P.I. BLuE™.

Phone: 314-739-1414

Fax: 314-739-1277

E-mail: Sales@chargingti.com

chargingti.com

Charging Technologies Inc™

4328 Bridgeton Industrial Drive

Bridgeton, Missouri 63044

TOBI-BLUE-01122024


**CHARGING
TECHNOLOGIES, INC.**

TOBi P.I. BLuE™



Download TOBi BLuE™

Scan the QR code on your preferred app store to download.




Watch Installation Instructions



Battery ID	Factory ID	State	Volts	V/C	Amps	AH	S.O.C.	Temp.	Avg. Temp.	Event (Bat.)	Event (File)	H2O
Dock Door 36	0000003C4401	IDLE	12.2	2.03	0	0	8%	73	72	41	41	LOW

Charger ID	Factory ID	State	Volts	V/C	Amps	AH	Charge Time	Battery Temp.	Battery ID
00000040F9E8	00000040F9E8	READY FOR BATTERY	0.0	0.00	0	0	0:00	NA	NA

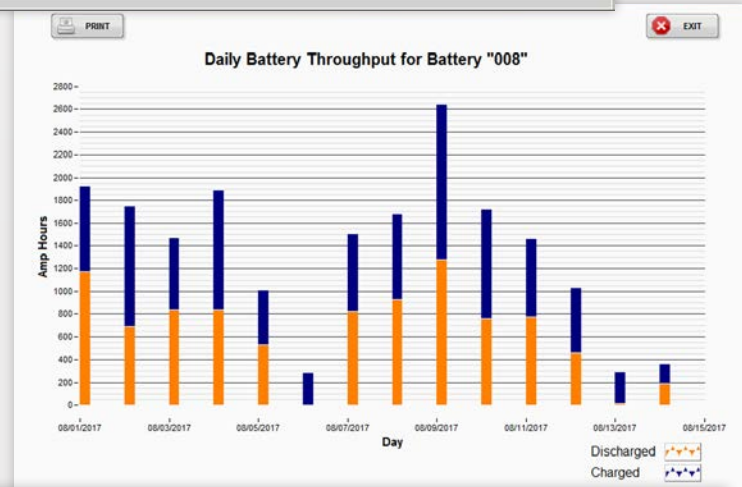

ID	CHARGE TIME	DISCHARGE TIME	OLD ENL CHARGE	OLD DRY CHARGE	MAX AMPS	AM USED	MIN SOC	MAX VOLTS	MIN FOLTS	MAX TEMP	MIN TEMP	#2 CHARGES	MAX DV	WATER LOW	
1	0	0:15	0:00	0:00	0	0	0.00	2.7	0.0	71	68	0	1.51	0:00	
2	0	0:20	0:10	0:12	25:28	256	187	78	2.08	71	62	0	2.08	0:00	
3	0	0:10	0:00	0:00	0:00	0	0	100	2.48	71	68	0	0.41	0:00	
4	0	0:18	0:00	0:00	0:00	0	0	100	2.35	71	70	0	0.48	0:00	
5	0	0:00	0:00	0:00	0:00	0	0	100	2.18	61	76	68	0	0.39	0:13
6	0	0:08	2:27	0:00	23:30	258	7	21	2.27	61	74	89	0	0.35	0:00
7	0	0:18	0:00	0:00	0:00	0	0	100	2.01	61	76	47	0	0.49	0:00
8	0	0:10	0:12	0:00	0:07	35	0	22	2.27	61	72	48	0	0.48	0:13
9	0	0:11	0:00	0:00	0:00	0	0	100	2.27	61	76	68	0	0.49	0:00
10	0	0:11	0:00	0:00	0:00	0	0	100	2.28	61	76	68	0	0.48	0:00
11	12:05	06:11:00	01:30:00	06:16:00	0:15	251	916	84	2.78	61	85	146	0	0.44	0:04
12	0	0:00	0:00	0:00	0:00	0	0	100	2.18	61	76	68	0	0.49	0:00
13	0	0:00	0:00	0:00	0:00	0	0	100	2.08	61	76	68	0	0.41	0:00
14	0	0:00	0:00	0:00	0:00	0	0	100	2.08	61	76	68	0	0.41	0:00
15	0	0:00	0:00	0:00	0:00	0	0	100	2.08	61	76	68	0	0.47	0:00
16	0	0:10	0:00	0:00	0:00	0	0	100	2.18	61	76	68	0	0.44	0:00
17	0	1:03	11:58	11:11	0:24	225	190	6	2.5	68	71	71	0	0.57	0:00
18	0	0:00	0:00	0:00	0:00	0	0	100	2.05	71	71	0	0.5	0:00	
19	0	0:00	0:00	0:00	0:00	0	0	100	2.07	61	71	47	0	0.48	0:00
20	0	0:11	0:00	0:00	0:00	0	0	100	2.27	61	76	70	0	0.48	0:00



Empowering Industries for 50 Years



Phone: 314-739-1414
 Fax: 314-739-1277
 E-mail: Sales@chargingti.com
chargingti.com

Charging Technologies Inc™
 4328 Bridgeton Industrial Drive
 Bridgeton, Missouri 63044
 TOBi-BLUE-01122024

